

## AGRICULTURAL CROP CLASSIFICATION USING THE SPECTRAL-TEMPORAL RESPONSE SURFACE

CARLOS ANTONIO OLIVEIRA VIEIRA<sup>1</sup>  
PAUL MATHER<sup>2</sup>  
PAUL APLIN<sup>2</sup>

<sup>1</sup>UFV - Universidade Federal de Viçosa  
Departamento de Engenharia Civil,  
Campus da UFV-DEC Viçosa MG 36.571-000, Brazil  
carlos.vieira@ufv.br

<sup>2</sup>The University of Nottingham  
The School of Geography,  
University Park, Nottingham, NG7 2RD, UK  
Paul.Mather@nottingham.ac.uk and Paul.Aplin@nottingham.ac.uk

**Abstract.** A method for classifying agricultural crops using multi-temporal, multi-spectral and multi-source remotely-sensed data is described. The procedure characterizes all the pixels in a scene by considering their intensity values as a function of time of imaging and spectral waveband. An analytical surface is interpolated through these data points, which may be irregularly spaced. Two fitted function interpolation methods were used to generate and parameterize the analytical surfaces. Then, the surface coefficients were input to two different supervised classifiers (Maximum Likelihood and Artificial Neural Network algorithms). Results show that classification accuracy is significantly improved in comparison with the use of any single-date image. Classification accuracies in excess of 87% were achieved. The advantages of the methodology described in this paper are that it takes account of the reflectance spectra at different points in the growing season, and that the time periods between images, as well as the wavebands, need not be the same at each date. Thus, the procedure can handle data from sensors such as SPOT HRV and Landsat TM. In addition, the use of coefficients to represent the analytical surfaces significantly reduces the amount of data processing, whilst maintaining information reliability.

**Keywords:** image classification, multitemporal classificatios, multi-source classification, neural networks.

### 1. Introduction

Efficient crop management practices require accurate and rapid information about crop distributions. Commonly, multispectral remotely sensed images are used to distinguish crop types on the basis of their spectral properties (Mather, 1999). However, such analysis involving single-date images has the drawback that, since maximum discrimination between different crop types occurs at different stages in the growth cycle, not all differences are incorporated in the procedure. Moreover, different crop types represented in the area under study may be at different stages of growth. In addition, the temporal 'profile' of the spectral reflectance curve of each crop is not taken into account. Such profiles may be of considerable value in discriminating between crop types, which may be difficult to distinguish at certain points in the growth cycle. Furthermore, results derived from data obtained by different sensors may not be comparable due to differences in spectral and spatial characteristics. Finally, since agricultural crops are dynamic, it is often useful to observe their development over time (e.g., crop yield estimation). A solution is to use multitemporal images for crop monitoring (Badhwar et al., 1982). For most current multitemporal classification techniques, a correspondence of time to growth state is established for each possible crop category that minimises the smallest difference between the given multispectral-multitemporal vector and the category mean vector indexed by growth state (Haralick et al., 1980). These techniques, however, are fairly inaccurate since only relatively few static spectral and temporal

'snapshots' contribute to crop identification. That is, images with specific spectral wavebands acquired on specific dates are used, rather than images with entire spectral and temporal continua. Using the latter may increase crop classification accuracy since they contain more information than the former (Labin and Strahler, 1994).

This paper demonstrates a method of classifying agricultural crops using the spectral-temporal signatures of remotely sensed images. Per-pixel classifications are performed using multispectral, multitemporal and multisource data, whereby analytical surfaces representing the spectral and temporal continua of each feature (pixel) are interpolated and their coefficients are used as discriminating variables.

## 2. Study Area and Data Set

The study area was located near the town of Littleport in Cambridgeshire, eastern England. This area was approximately at mean sea level with gently undulating topography. The agriculture of the region was characterized by rotational crop plantation techniques.

Eight remotely sensed images acquired throughout the 1994 summer growing season were used for analysis. These included four Landsat TM images (11 June, 27 June, 20 July, 14 August) and four SPOT HRV images (13 May, 28 June, 30 July, 14 August). Only six spectral wavebands of Landsat TM imagery were used since the thermal infrared band (band 6) was omitted from analysis. In addition, local farmers' Field Data Printouts for 1994 were collected and used to generate a ground reference data set.

All images were geometrically registered to the British National Grid. For each image, registration was performed using 17 ground control points and nearest neighbor re-sampling, since this technique maintained the original pixel values (Jensen, 1986). In each case, the root-mean-square error associated with registration was less than 0.5 pixels.

Atmospheric correction was performed to account for atmospheric differences between multitemporal images. Initially, image digital numbers were corrected to radiance using information supplied with the image data files (Teillet and Fedosejevs, 1995). Radiance was then converted to apparent reflectance (recorded at the sensor) and finally to surface reflectance. The final step used an inversion of the 5S (Simulation of the Satellite Signal in the Solar Spectrum) model (Tanré, 1990).

## 3. The Spectra-Temporal Response Surfaces (STRS) Model

Badhwar et al. (1982), Badhwar (1984), Haralick et al. (1980), Lambin and Strahler (1994) and Ortiz et al. (1997) consider the problem of characterizing the temporal dimension but none utilizes the method proposed by Vieira et al. (1998, 2000), involving the use of the spectra-temporal response surfaces (STRS), which provide for the generalisation in time of spectral reflectance properties of agricultural areas. The type and sequence of procedures used in the generation and potential use of the STRS representations are outlined in **Figure 1**.

The STRS approach is based on a view of multi-band and multitemporal imagery from different sources represented in a three-dimensional space, the axes of which are time ( $x$ ), spectral waveband ( $y$ ) and reflectance ( $z$ ). Measurement from a number of different sensors in the optical wavebands can be plotted in this space. A bivariate polynomial of the form:  $z = F(x,y)$ , where  $F()$  indicates a polynomial function of some order, is generated for each of the crop types in the area of study. Two methods were used in order to generate the fitted surfaces: polynomial trend surface analysis (PTS) and collocation (COL), since fitted function interpolation can impose a prescribed general behavior on the surface to override aberrant, anomalous, or noisy data. Watson (1999) and Lam (1983) give comprehensive reviews on these interpolations methods and Mather (1976) reviews polynomial trend surfaces.

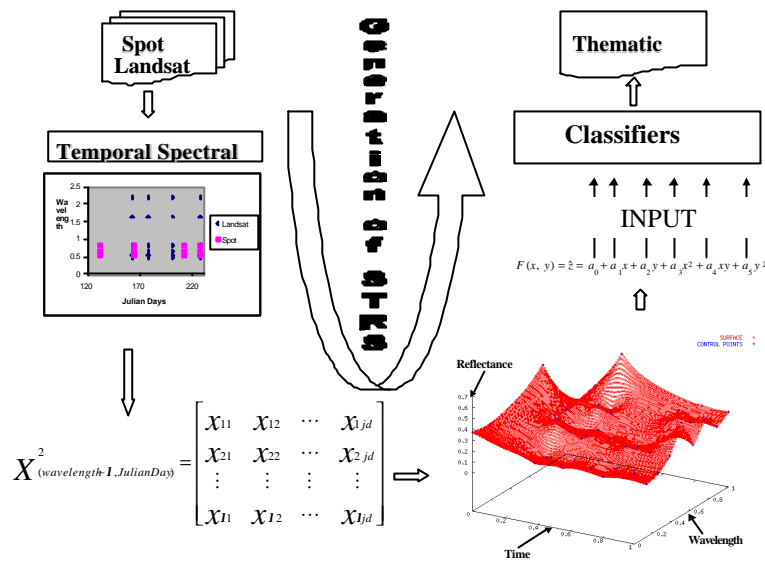


Figure 1. An outline of the methodology followed in this study to generate the STRS representations

These analytical functions are then parameterized and their coefficients, rather than the pixel values in each spectral band, are used as input features in the image classification process.

## 4. Methodology

### 4.1. Sampling Techniques and Classification Phase

From the co-registered and radiometrically corrected image set, two independent sample sets (total 1440 pixels) were selected using stratified random sampling technique and representing the six most common cover types in the study area: Potatoes, Sugar beet, Wheat, Fallow, Onions, and Peas. Each sample has 120 patterns per class (total 720 pixels). One sample (selected at random) was used to training the classifier and the other one was reserved for validating the methodology.


The image acquisition dates were expressed in the form of Julian days ( $x$ -axis) and the spectral dimensions ( $y$ -axis) were characterized by their medial waveband values computed in the form of wavelengths. Thus, the spectral bands were labeled using the medial wavelength values of 0.458, 0.56, 0.66, 0.83, 1.645, 2.215 – given to the six available TM channels (except the thermal infrared TM band 6) - and 0.545, 0.645, 0.84 – given to the three HRV channels respectively.

The radiometric properties are expressed in the form of reflectance values along the  $z$ -axis. Furthermore, for each pixel, 36 three-dimensional control points were generated (4 TM images with 6 bands plus 4 SPOT HRV images with 3 bands). It is important to mention that the values along the  $x$ ,  $y$  and  $z$  axes are scaled into the interval between 0 and 1, sometimes referred to as normalization, before the interpolation phase.

Initially the control points were used to fit a surface using a Polynomial Trend Surface as described earlier. Although a surface order of 7 (36 coefficients) explained over 99% of the sum of squares, using a surface order of 3 (10 coefficients) experimentally proved to be enough to characterize the analytical surfaces. Then, the same control points were used to fit a surface using the Collocation Interpolator. As the interpolated coefficients show different magnitudes on their values, they were again scaled collectively to the interval between 0 and

1 before the training and test phases. One pixel example of the PTS and Collocation analytical surfaces is shown in **Figure 2** (a to f) for each crop.

According to Vieira et al. (2000) the Maximum Likelihood (ML) classifier is the algorithm that best combines classification accuracy and computational economy when these coefficient are used as input into the classification process. Therefore, a supervised classification was performed using the Maximum Likelihood (ML) algorithm developed by Mather (1999) and adapted to classify 3D surface coefficients.

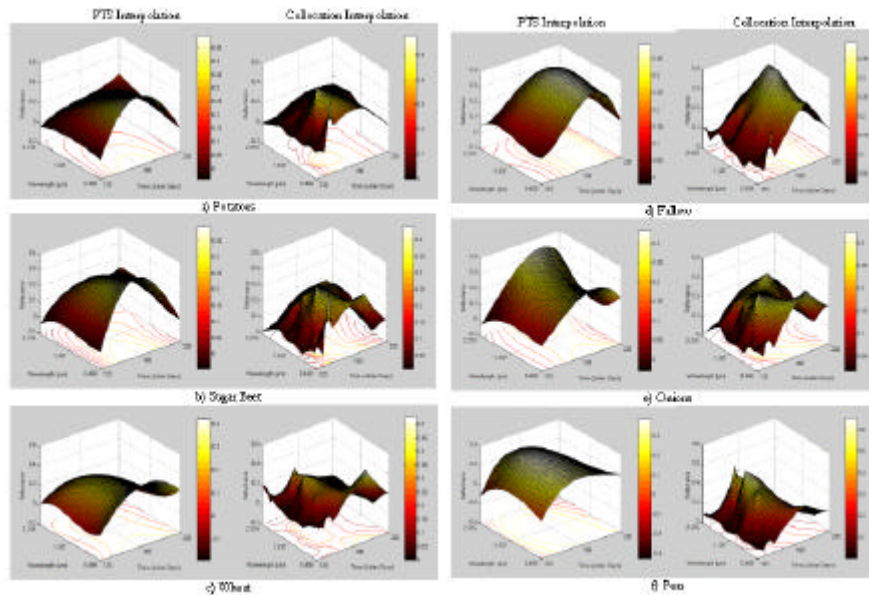

**Figure 2.** Analytical surfaces and contours for several crops.

For the purposes of comparison, a single-date image (Landsat TM, acquired on 27th June 1994) was used to perform a standard classification in order to compare the results of this multitemporal and multisource method against a classification based on a single-date image. For each pixel, the six reflectance values are considered together and, therefore, generating a six dimensional vector, to be also used as input into the supervised classifiers: Maximum Likelihood (ML), Artificial Neural Network (ANN) and two variants of an Artificial Neural Network (ANN and ANNT).

Both artificial neural network architectures chosen are multilayer perceptrons using the backpropagation algorithm (Benediktsson et al., 1990; Bischof et al., 1992; Civco, 1993). The only difference between the models is in the input layer. The first ANN model was implemented having one pixel per spectral band in the input layer. Therefore, this neural network had 6 nodes in the first layer. The input nodes in the ANNT model represented a 3 by 3 window of pixel data from each band of the image (total 54 nodes in the input layer) as the input (Paola, 1995). This input modification takes local texture information into account.

All neural networks configurations tested had an output layer with 6 nodes, corresponding to the 6 general crop classes. The number of hidden layers and the number of hidden nodes were found (1 hidden layer and 10 nodes) using the Hirose et al. (1991) building up procedure. The learning rate and momentum were set initially at 0.2 and 0.9 respectively. The learning rate was reduced during the training to 0.1 after 1000 epochs.

For this second experiment, two sample sets were selected using stratified random sampling based on the reference image (ground truth), which was generated in the same scale and projection system as the remotely sensed data. Each sample has also 120 patterns per class (total 720). One sample set was used to training the classifiers and the another independent sample set were reserved to assessing the accuracy of the classification.

## 4.2 Accuracy Assessment

In order to perform a systematic investigation of the relative (improvement of accuracy) cost involved in the incorporation of the temporal dimension into the crop classification process, standard accuracy measures derived from a confusion matrix were computed, using an independent test data set based on the Field Data Printouts. The measures based on the confusion matrix were overall accuracy, individual class accuracy, producer's accuracy and user's accuracy. The calculations associated with these measures are described in standard textbooks (e.g., Mather, 1999). The Kappa coefficient, conditional Kappa for each class, and test Z statistics, all of them widely used statistics derived from the contingency matrix, were also computed (Congalton and Green, 1999).

In addition, a pairwise test statistic for evaluating the significance of the classifiers (represented here by their respective confusion matrices), was calculated utilizing the Kappa coefficients. These results are summarized in form of a *significance matrix*, in which the major diagonal elements indicate if the respective classification result is meaningful. In this single confusion matrix case, the Z value can be computed using the formula  $Z = Ka / \sqrt{\text{var}(Ka)}$ , where Z is standardized and normally distributed and var is the large sample variance of the Kappa coefficient K. If  $Z \geq Z_{\alpha/2}$ , the classification is significant better than a random classification, where  $\alpha/2$  is the confidence level of the two-tailed Z test and the degrees of freedom are assumed to be infinity. On the other hand, the off diagonal elements give an indication, again if  $Z \geq Z_{\alpha/2}$ , that the two independent classifiers are significantly different. The formula used to test for significance of the difference between the two independent Kappa coefficients is:  $Z = |Ka_1 - Ka_2| / \sqrt{\text{var}(Ka_1) + \text{var}(Ka_2)}$ , where the  $Ka_1$  and  $Ka_2$  are the two Kappa coefficients in comparison (Congalton and Green, 1999).

## 5. Results and Discussions

Classification accuracies for six agricultural crops using the six multispectral bands of a single-date TM Landsat image, Polynomial Trend Surface (PTS) and Collocation as input features into three supervised classification algorithms - maximum likelihood (ML), artificial neural networks (ANN) and artificial neural network texture (ANNT) are presented in **Table 1**. Individual classification accuracy for each crop (Conditional Kappa \* 100), overall accuracy, the value of the Kappa coefficients and their variances, and test Z statistic are reported in this table. These accuracies were calculated from an independent dataset (720 patterns). The pixels received the label of the output class having the highest probability.

As the absolute value of the test Z statistic is greater than critical value of 1.96, all the classification results are significant better than a random classification at the 95% confidence level. Moreover, it is noteworthy that the level of accuracy was gradually improved by employing to the single-date Landsat image the different classifiers ML (72.9%), ANN (77.6%) and ANNT (81.7%) respectively. However, the overall performance level attained with the features generated using the STRS (i.e., the PTS and Collocation coefficients) as input features into a ML classifiers were considerably greater (by 5.7%) than the ones obtained by a single-date image. Oddly fallow is the only individual category for which the accuracy was decreased using PTS and Collocation features.

The lower performance achieved with ML classifier using only the TM multispectral bands is believed to be due in part to a non-linear separability of the classes under study and to a magnitude of training data set inconsistent with the design properties and assumptions of the supervised maximum likelihood algorithms. Moreover, for some of the crops (e.g., sugar beet and potatoes, or onions and peas) the multispectral profiles for that date are not very well separated. Even so, the neural models produce a satisfactory performance on the same data

set. Furthermore, the separability of the classes are considerable improved when the local spatial variance of individual pixels is implicitly taken as input into the neural network model by employing a widows 3 x 3 as implemented in the ANNT algorithm.

**Table 1.** Classification accuracies for six agricultural crops using Single-Date LANDSAT Image, Polynomial Trend Surface (PTS) and Collocation (COL) and three classification algorithms - maximum likelihood (ML), artificial neural networks (ANN) and artificial neural network texture (ANNT). The table shows individual classification accuracy for each crop (Conditional Kappa \* 100), overall accuracy, the value of the Kappa coefficients and their variances, and test Z statistic. If the absolute value of the test Z statistic is greater than 1.96, the result is significant better than a random classification at the 95% confidence level. These accuracies were calculated from an independent dataset test (720 patterns).

INTERPO.	LANDSAT(27/06/94)			STRS	
	ML	ANN	ANNT	PTS-ML	COL-ML
Potatoes	64.5	66.8	71.9	95.9	94.9
Sugar Beet	53.8	57.9	58.6	73.8	75.3
Wheat	70.9	75.6	95.5	89.3	92.8
Fallow	80.4	81.8	79.7	70.8	63.3
Onions	84.9	89.7	88.0	95.9	97.8
Peas	53.5	67.9	80.8	93.0	100.0
OVERALL(%)	72.9	77.6	81.7	87.4	87.2
Kappa	0.675	0.732	0.780	0.848	0.847
Variance	0.000394	0.000347	0.000299	0.000219	0.000222
Z	33.99	39.28	45.09	57.27	56.88

**Table 2** provides the computed Z values for a pairwise statistical test in order to check how significant are the improvements on the classification accuracy. The classification accuracy obtained using the STRS approach (PTS and Collocation using ML algorithm) were found to be significantly improved in relation to the individual classifiers ML, ANN and ANNT, in which only a multispectral single-date image was used as discriminate variables (see yellow pair,  $Z > 1.96$  at 95% of confidence level). This demonstrates a need to utilise the STRS approach if one is to achieve the highest accuracies possible in crop discrimination. Moreover, there is no significant difference between the performance of the ML using PTS or Collocation coefficient as input features (see blue pair,  $Z = 0.05 < 1.96$ ). Therefore, it could be concluded that, for this data set, these two sets of feature variables may work together because they produce approximately equal classifications. If two different techniques or algorithms were being tested and if they were shown to be not significantly different, then it would be best to use the cheaper, quicker, or more efficient approach.

**Table 2.** Results of Kappa Analysis for comparison among the classifiers. The table also presents the Kappa coefficients and variance for each classifier. The Z values (in major diagonal and off diagonal elements) were computed using formula as describe in subsection 4.2.

CLASSIF	ML	ANN	ANNT	TSA	COL
KAPPA	0.675	0.732	0.78	0.848	0.847
VAR	0.000394	0.000347	0.000299	0.000219	0.000222
ML	34.01				
ANN	2.09	39.30			
ANNT	3.99	1.89	45.11		
TSA	6.99	4.88	2.99	57.30	
COL	6.93	4.82	2.94	0.05	56.85

As have been expected the use of neural network models significantly overcome the performance of the ML classifier using a single date Landsat TM image. However, the results indicate that there are no significant differences in performance between the ANN and ANNT algorithms ( $Z = 1.89 < 1.96$ ) at the same confidence level.

## 6. Conclusions

A methodology for classifying agricultural crops combining multi-temporal, multi-spectral and multi-source remotely-sensed data has been shown to be effective in identifying general agricultural crop classes over an area in East Anglia (UK). Classification accuracies in excess of 87% were achieved, even though parts of some of the images are covered by clouds. The basic assumption of the method, that different crops have different spectral-temporal trajectories, has been used in earlier studies. However, the methods used to characterize the spectral reflectance changes over a growing season using a spectral-temporal surface represents a promising new approach, for several reasons. First, the method can deal with multi-sensor data, as the spectral bands measured at each date do not need to be the same. Second, data points obscured by clouds can be filtered out throughout the interpolation and parameterization procedures of the analytical surfaces. Third, the overall spectral variation of a given crop class over the growing season is captured by a set of coefficients, which are fewer in number than the training data pixels and hence produce computationally more efficient classifiers.

## 7. Acknowledgements

Preliminary research by Dr. Vieira was supported by the Brazilian Research Council (CAPES). The later stages of this study were conducted as part of the FET-ENVIS project, a European Commission-funded RTD (Proposal Number IST-1999-29005) performed in collaboration with Nansen Environmental and Remote Sensing Centre, Norway and Ruhr-Universität Bochum, Germany. We are grateful to Logica PLC and SPOT Image for permission to use their images. Computing facilities were provided by the School of Geography, The University of Nottingham, as well as the Civil Engineering Department of the Federal University of Viçosa.

## Referências

- Mather, P. M., *Computer Processing of Remotely-Sensed Images: An Introduction*. John-Wiley and Sons, Chichester, Second edition, 1999.
- Badhwar, G. D., Autin, W. W., Carnes, J. G., A semi-automatic for multitemporal classification of a given crop within a Landsat scene. *Pattern Recognition*, v. 3, 1982, p. 217-230.
- Haralick, R. M., Hlavka, C. A., Yokoyama, R., Carlyle, S. M., Spectral-temporal classification using vegetation phenology. *IEEE Trans. on Geosc. and Remote Sensing*, GE-18/2, 1980, p. 167-174.
- Lambin, E. F., and Strahler, A. H., Indicators of land-cover change for change-vector analysis in multitemporal space at coarse spatial scales, *International Journal of Remote Sensing*, v. 10, 1994, p. 2099-2119.
- Jensen, J. R., *Introductory Digital Image Processing: A Remote Sensing Perspective*, Prentice-Hall, Englewood Cliffs, NJ, 1986.
- Teillet, P. M. and Fedosejevs, G., On the dark target approach to atmospheric correction of remotely sensed data, *Canadian Journal of Remote Sensing*, v. 21, 1995, p. 374-387.
- Tanré, D., Deroo, C., Duhaut, P., Herman, M., Morcrette, J. J., Perbos, J. and Deschamps, P. Y., Description of a computer code to simulate the satellite signal in the solar spectrum: the 5S code, *International Journal of Remote Sensing*, v. 11, 1990, p. 659-668.
- Badhwar, G. D., Classification of corn-soybean using multitemporal Thematic Mapper data, *Remote Sensing of Environment*, v. 16, 1984, p. 175-182.
- Ortiz, M. J., Formaggio, A. R., and Epiphano, J. C. N. Classification of croplands through integration of remote sensing, GIS and historical database. *International Journal of Remote Sensing*, v. 18, 1997, p. 95-105.

- Vieira, C. A. O., Mather, P. M., Tso, B. C. K., and McCullagh, M. J. Using multi-temporal, multi-spectral and multi-source remotely sensed data to classify agricultural crops, In *RSS98 - Developing International Connections, Proceedings of the 24th Annual Conference and Exhibition of the Remote Sensing Society*, University of Greenwich, 9-11 September, 1998, p. 354-360.
- Vieira, C. A. O., Mather, P. M., and McCullagh, M., The Spectral-Temporal Response Surface and its use in the multi-sensor, multi-temporal classification of agricultural crops. In *ISPRS: IAPRS*, v. 33, 2000, Amsterdam, The Netherlands, Part B2 (Amsterdam, International Society for Photogrammetry and Remote Sensing) pp. 582-589.
- Watson, D. F., *Contouring: A guide to the analysis and display of spatial data*. Pergamon Press, Oxford, 1999, p. 101-161.
- Lam, N. Spatial interpolation methods: a review. *The American Cartographer*, v. 2, 1983, p. 129-149.
- Mather, P. M., *Computational Methods of Multivariate Analysis in Physical Geography*. John Wiley and Son, Chichesters, 1976.
- Benediktsson, J. A.; Swain, P. H. and Ersoy, O. K., Neural network approaches versus statistical methods in classification of multisource remote sensing data. *IEEE Trans. on Geoscience and Remote Sensing*, GE-28, 1990, p. 540-552.
- Bischof, H., Schneider, W., and Pinz, A. J., Multispectral Classification of Landsat-images using neural networks, *IEEE Trans. on Geosc. and Remote Sensing*, v. 3, 1992, p. 482-490.
- Civco, D. L. Artificial neural networks for land-cover classification and mapping. *International Journal of Geographic Information Systems*, v. 7, 1993, p. 173-183.
- Paola, J. D., and Schowengerdt, R. A. A review and analysis of backpropagation neural networks for classification of remotely-sensed multispectral imagery, *International Journal of Remote Sensing*, v. 16, 1995, p. 3033-3058.
- Hirose, Y., Yamashita, K. and Hijiya, S. Back-propagation Algorithm which varies the number of hidden units, *Neural Networks*, v. 4, 1991, p. 61-66.
- Congalton, R. G., and Green, K., *Assessing the Accuracy of Remotely Sensed Data: Principles and Practices*, Lewis Publishers, New York, 1999.